

STICK LAMP



Please read the USER GUIDE carefully and keep safe before using the product.
This product is only for adult but not a toy.

Product Specifications

Size 40×42.5×156mm Weight 140g

Main Technical Parameters

Lantern

| | |
|--|--------------------|
| Lantern LED | COB 5W, 3500-4000K |
| The Max. Luminous Flux(High Lighting) | ≥400Lm |
| The Max. Luminous Flux(Low Lighting) | ≥5Lm |
| Working Time after Fully charge(High Lighting) | ≥120 Minutes |
| Working Time after Fully charge(Low Lighting) | ≥65 Hours |

Torch

| | |
|--|--------------------|
| Torch LED | COB 3W, 3500-4000K |
| The Max. Luminous Flux(High Lighting) | ≥300Lm |
| The Max. Luminous Flux(Low Lighting) | ≥5Lm |
| Working Time after Fully charge(High Lighting) | ≥270 Minutes |
| Working Time after Fully charge(Low Lighting) | ≥65 Hours |

Lantern&Torch

| | |
|---------------------------------------|--------|
| The Max. Luminous Flux(High Lighting) | ≥700Lm |
|---------------------------------------|--------|

Others

| | |
|---------------------------------------|----------------------|
| Specification of Battery | 21700, 3.7V, 3000mAh |
| Input Voltage/Current | 5V/ 2A |
| Fully Charge Time via USB Input Cable | Approx. 2 Hours |

Instructions for Use

1. Lighting Function

Double-click the lighting switch to turn on the light. Short press to switch lighting modes. The power indicator displays real-time battery level. Long press to adjust brightness. Double-click to turn off.

2. Battery Indicator: Displays battery level in real-time after booting up.

3. External Output: Utilizes Type-C for external output. Upon insertion, it automatically outputs and displays battery level. After removal, the battery level display turns off after about 30 seconds.

4. Charging Indicator: Uses Type-C for internal charging. During charging, the indicator flashes gradually until fully charged, at which point all four indicators remain lit

1 Battery Indicator Light


Output or Input



100% ○ ○ ○ ○
75% ○ ○ ○ ●
50% ○ ○ ● ●
25% ○ ● ● ●
0% ● ● ● ●



NOTE:
Please fully charge the product before first use



2 Activating Lighting Function

Camp Mode



Press twice to turn on or off
Click to switch mode



Seven lighting modes
Press the button and hold to adjust the brightness of light

- 1 Main lighting
- 2 Auxiliary lighting
- 3 Light strip
- 4 Lantern candle
- 5 Main lighting+ Auxiliary lighting
- 6 Light strip+ Auxiliary lighting
- 7 Light strip+ Main lighting

3 How to Place&Connect the Bracket

Hanger


1/4 threaded interface



Product use instructions

Functions and Features

1. Lantern
2. Torch
3. Indicator LED
4. Waterproof

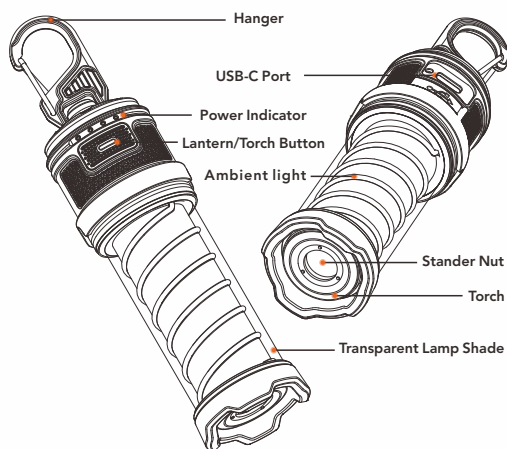

Cautions:

1. Do not look directly into LED as this may cause damage to your eyes.
2. This product is not a toy.
3. Contains small parts not suitable for children under 5 years of age.
4. Turn off the light when via USB input charging.
5. Every 6 months charge for battery conditioning.



MADE IN CHINA